



AMERICAN FLOOR PRODUCTS COMPANY, INC.



AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422


email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #


BUFFALO® Interlocking Tile (FE-1008)

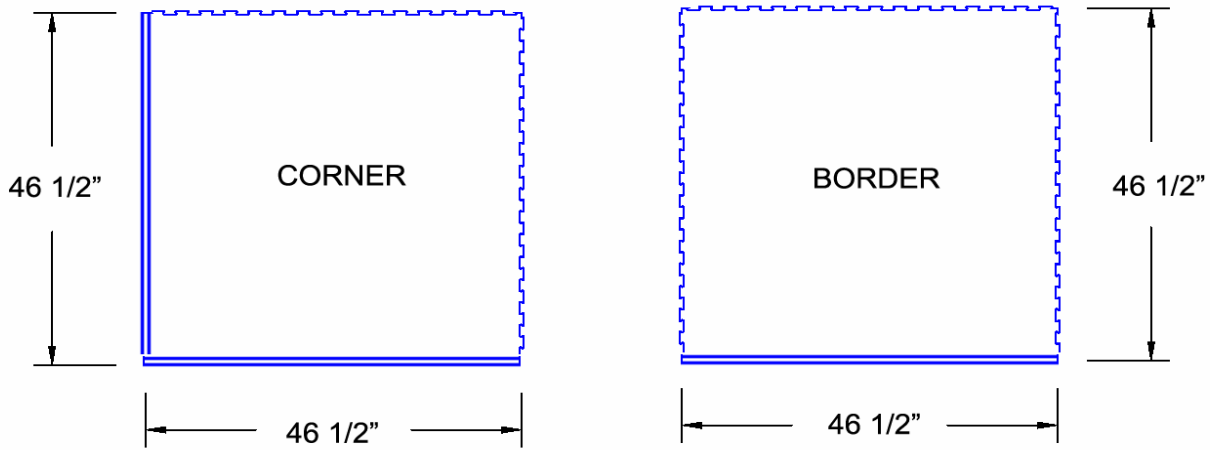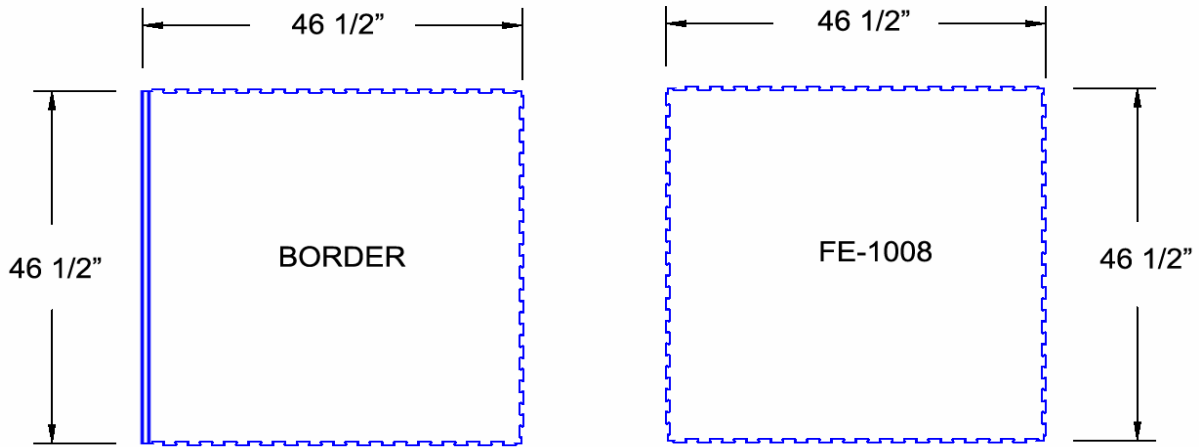

Beveled edge
(border tile and corners only)

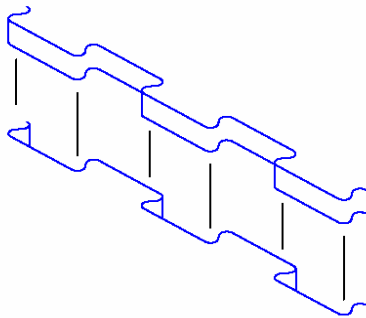

Interlocking Tab Detail

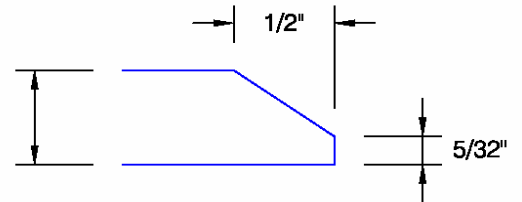

Section At Beveled Edge

BUFFALO[®] Interlocking Tile (FE-1008)

| Application | Surface | Free weight area | Material | Coefficient of friction | Flammability |
|--|----------|------------------------|-------------------------------|---------------------------------------|--|
| Fitness area Ice rink Ski lodge Multi-purpose | Textured | Standard Heavy-duty | Premium-grade recycled rubber | ASTM D 2047 Dry: 0.84 Wet: 0.90 | NFPA 253 ASTM E 648 MIL-M-15562F |

Testing in accordance with NFPA 253 (ASTM E 648):
 Class II Critical Radiant Flux 0.44 watts/cm²
 Passes MIL-M-15562 Dielectric strength

| | |
|--|---|
| <p>Features:</p> <ul style="list-style-type: none"> • Manufactured from heavy premium-grade recycled rubber • Flame resistance: Passes MIL-M-15562F, Class II (ASTM E 648; NFPA 253) • Static coefficient of friction (ASTM D 2047) Dry: 0.84 Wet: 0.90 • Weight: 2.6 lbs./sq. ft. | <p>Installation Options:</p> <ul style="list-style-type: none"> • Surface mount, loose lay <p>Standard Colors:</p> <ul style="list-style-type: none"> Black Coral Emerald Glacier Midnight Blue |
|--|---|

| | | |
|--------------------------------|---|-----------------|
| JOB NAME: | ITEMS | QUANTITY |
| JOB NUMBER: | Specify Thickness: 1/2" or 3/8" | |
| CONTRACTOR: | Center Tile: | |
| ARCHITECT: | Border Tile: | |
| DEALER NAME: | Corner Tile: | |
| SIGNATURE: Date: | Color: | |