



AMERICAN FLOOR PRODUCTS COMPANY, INC.





AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422

email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

BUFFALO® Mats (FE-1017)

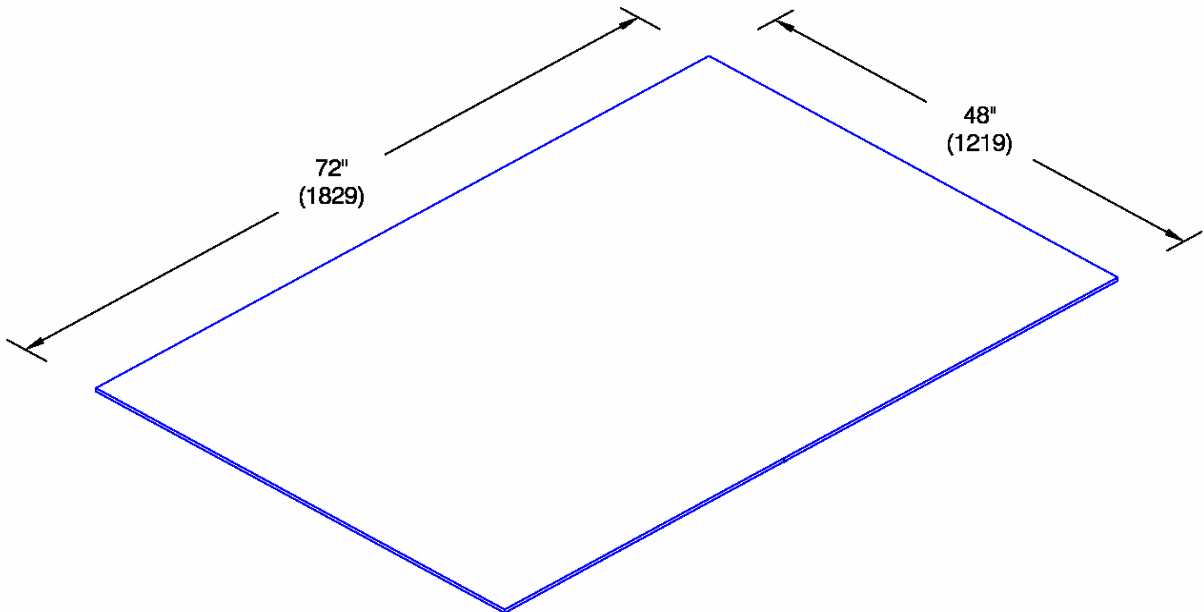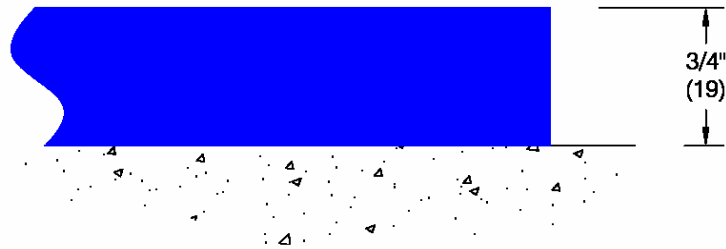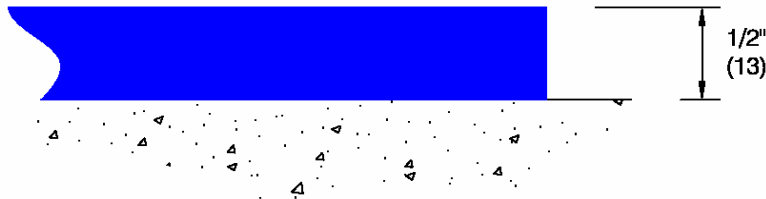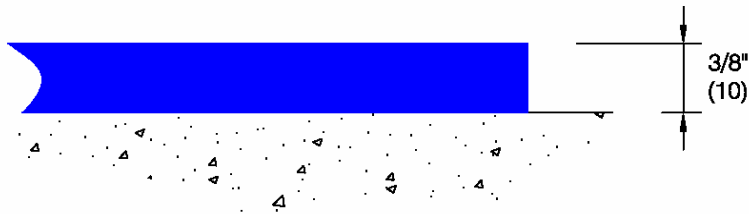

BUFFALO® Mats (FE-1017)

Application	Surface	Free weight area	Material	Coefficient of friction	Flammability
Fitness area Ice rink Ski lodge Golf club Multi-purpose	Textured	Standard Heavy-duty	Premium-grade recycled rubber	ASTM D 2047 Dry: 0.84 Wet: 0.90	NFPA 253 ASTM E 648 MIL-M-15562F

Testing in accordance with NFPA 253 (ASTM E 648):
 Class II Critical Radiant Flux 0.44 watts/cm²
 Passes MIL-M-15562F Dielectric strength

<p>Features:</p> <ul style="list-style-type: none"> • Manufactured from heavy premium-grade recycled rubber • Mat Sizes: 3/8" (10 mm) thick Weight: 48 lbs / mat 1/2" (13 mm) thick Weight: 65 lbs / mat 3/4" (19 mm) thick Weight: 100 lbs / mat 	<p>Installation Options:</p> <ul style="list-style-type: none"> • Surface mount, loose lay <p>Standard Color: Black only</p>
---	--

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	3/8"	
CONTRACTOR:	1/2"	
ARCHITECT:	3/4"	
DEALER NAME:	Color:	
SIGNATURE: _____	Date: _____	