



# AMERICAN FLOOR PRODUCTS COMPANY, INC.


**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422

email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## ROCKPORT TILE® Hammered Finish (WP-273)

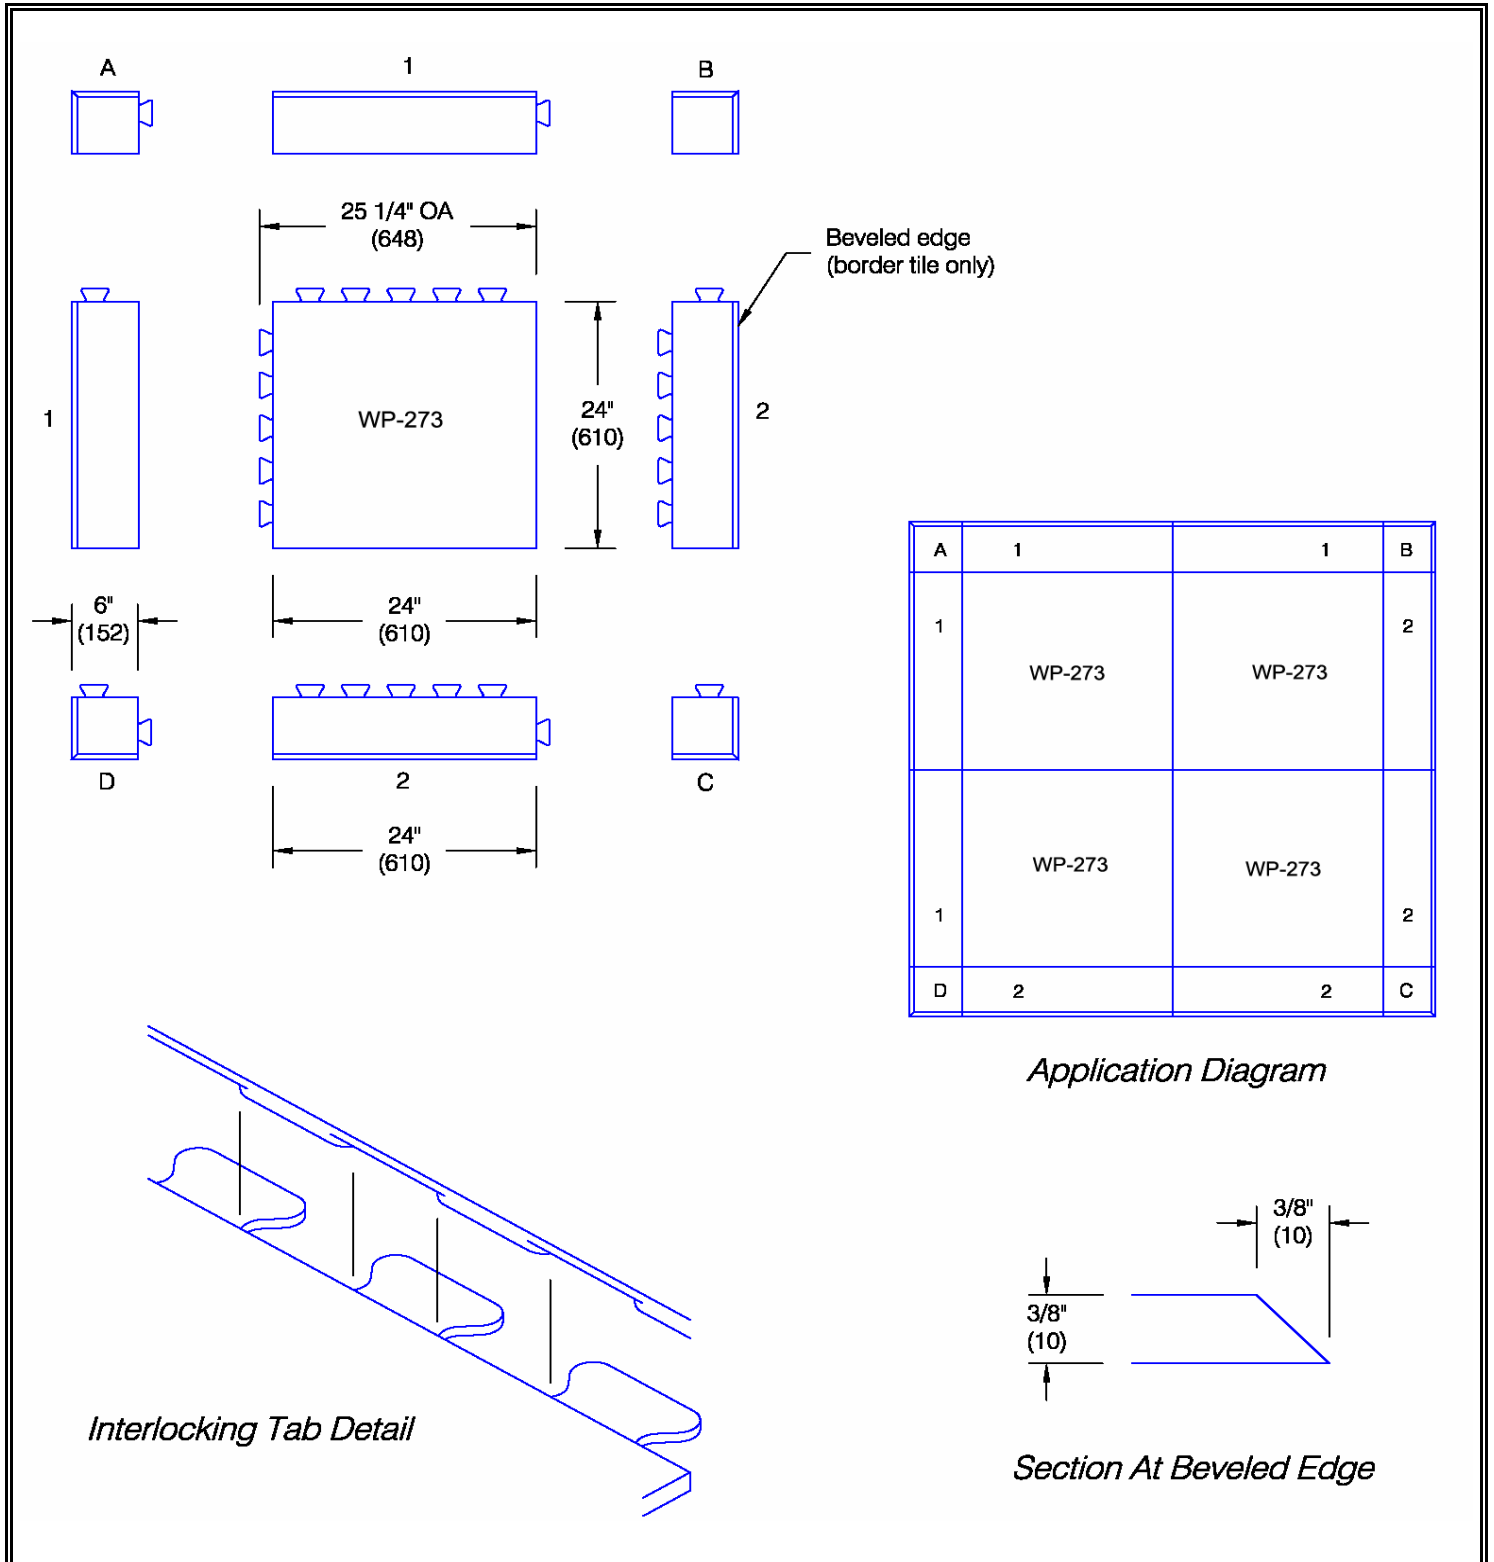

# ROCKPORT AEROBIC TILE® Hammered Finish (WP-273)

Application	Surface	Free weight area	Material	Coefficient of friction	Flammability
Fitness area Ice rink Ski lodge Multi-purpose Aerobics dance Lobby	Hammered	Standard	SBR Rubber	ASTM D 2047 Dry: 0.84 Wet: 0.90	NFPA 253 ASTM E 648

Testing in accordance with NFPA 253 (ASTM E 648):  
Class II                      Critical Radiant Flux 0.44 watts/cm<sup>2</sup>

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Hidden interlocking tabs</li> <li>• No adhesives required</li> <li>• 3/8" (10 mm) thick</li> <li>• Solid color throughout</li> <li>• Manufactured from premium virgin SBR rubber compound</li> <li>• Weight:             16 pounds (7.2 kg), each tile</li> <li>• Tile-to-tile interlocking</li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Hammered finish</li> </ul>
---	---

JOB NAME:	ITEMS		QUANTITY
JOB NUMBER:	Center Tile:		
CONTRACTOR:	Border Tile:	1	
		2	
ARCHITECT:	Corner Tile:	A	
		B	
DEALER NAME:		C	
		D	
SIGNATURE:                      Date:	Color:		