





AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

ECONO SPEED BUMP® (SB-2301)

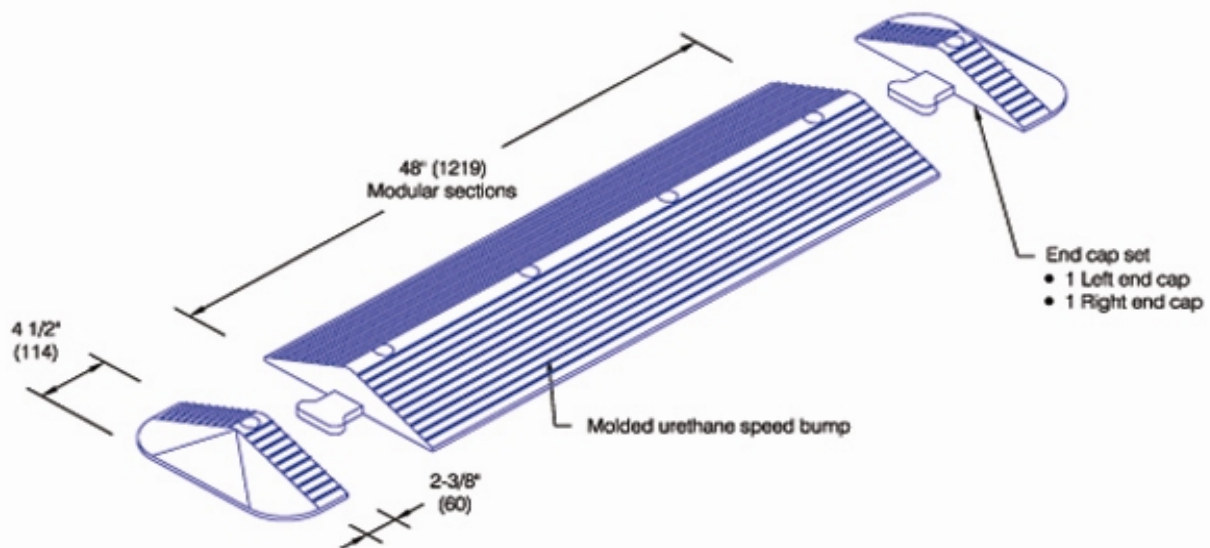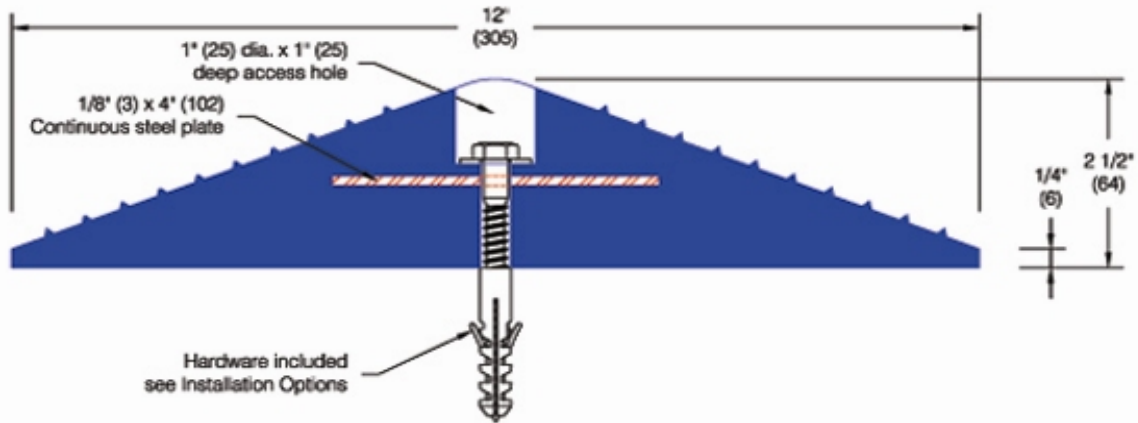

ECONO SPEED BUMP® (SB-2301)

Profile	Application	Shock absorbing	ADA Compliance	Material	Flammability & smoke developed (ASTM E-84)
Sculpted	Medium abuse	25.4 ft.lbs/in. ASTM D-256	N/A	Urethane	N/A

<p>Features:</p> <ul style="list-style-type: none"> • Molded urethane speed bump • Continuous 1/8" (3 mm) reinforcing steel plate • Weight: 20 lbs./section • Stock length: 4'-0" (1219 mm) modular sections 	<p>Installation Options:</p> <ul style="list-style-type: none"> • Hardware included per 4 ft. length <ul style="list-style-type: none"> (4) 5-10 Fisher nylon plugs (4) 5/16" x 3-1/2" (8 x 89 mm) Hex lag screws (4) 5/16" (8 mm) Flat washers (4) Dust plugs (#12 x 1-1/2" (38 mm) FH wood screw. • Hardware included per end cap set <ul style="list-style-type: none"> (2) 5-10 Fisher nylon plugs (2) 5/16" x 3-1/2" (8 x 89 mm) Hex lag screws (2) 5/16" (8 mm) Flat washers (2) Dust plugs (#12 x 1-1/2" (38 mm) FH wood screw. <p>Standard Color: (104) Safety Orange</p>
---	---

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Speed Bump:	
CONTRACTOR:		
ARCHITECT:		
DEALER NAME:		
SIGNATURE: _____	Date: _____	