




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## ELECTRA<sup>®</sup> 4" Corner Guard (CG-2144)

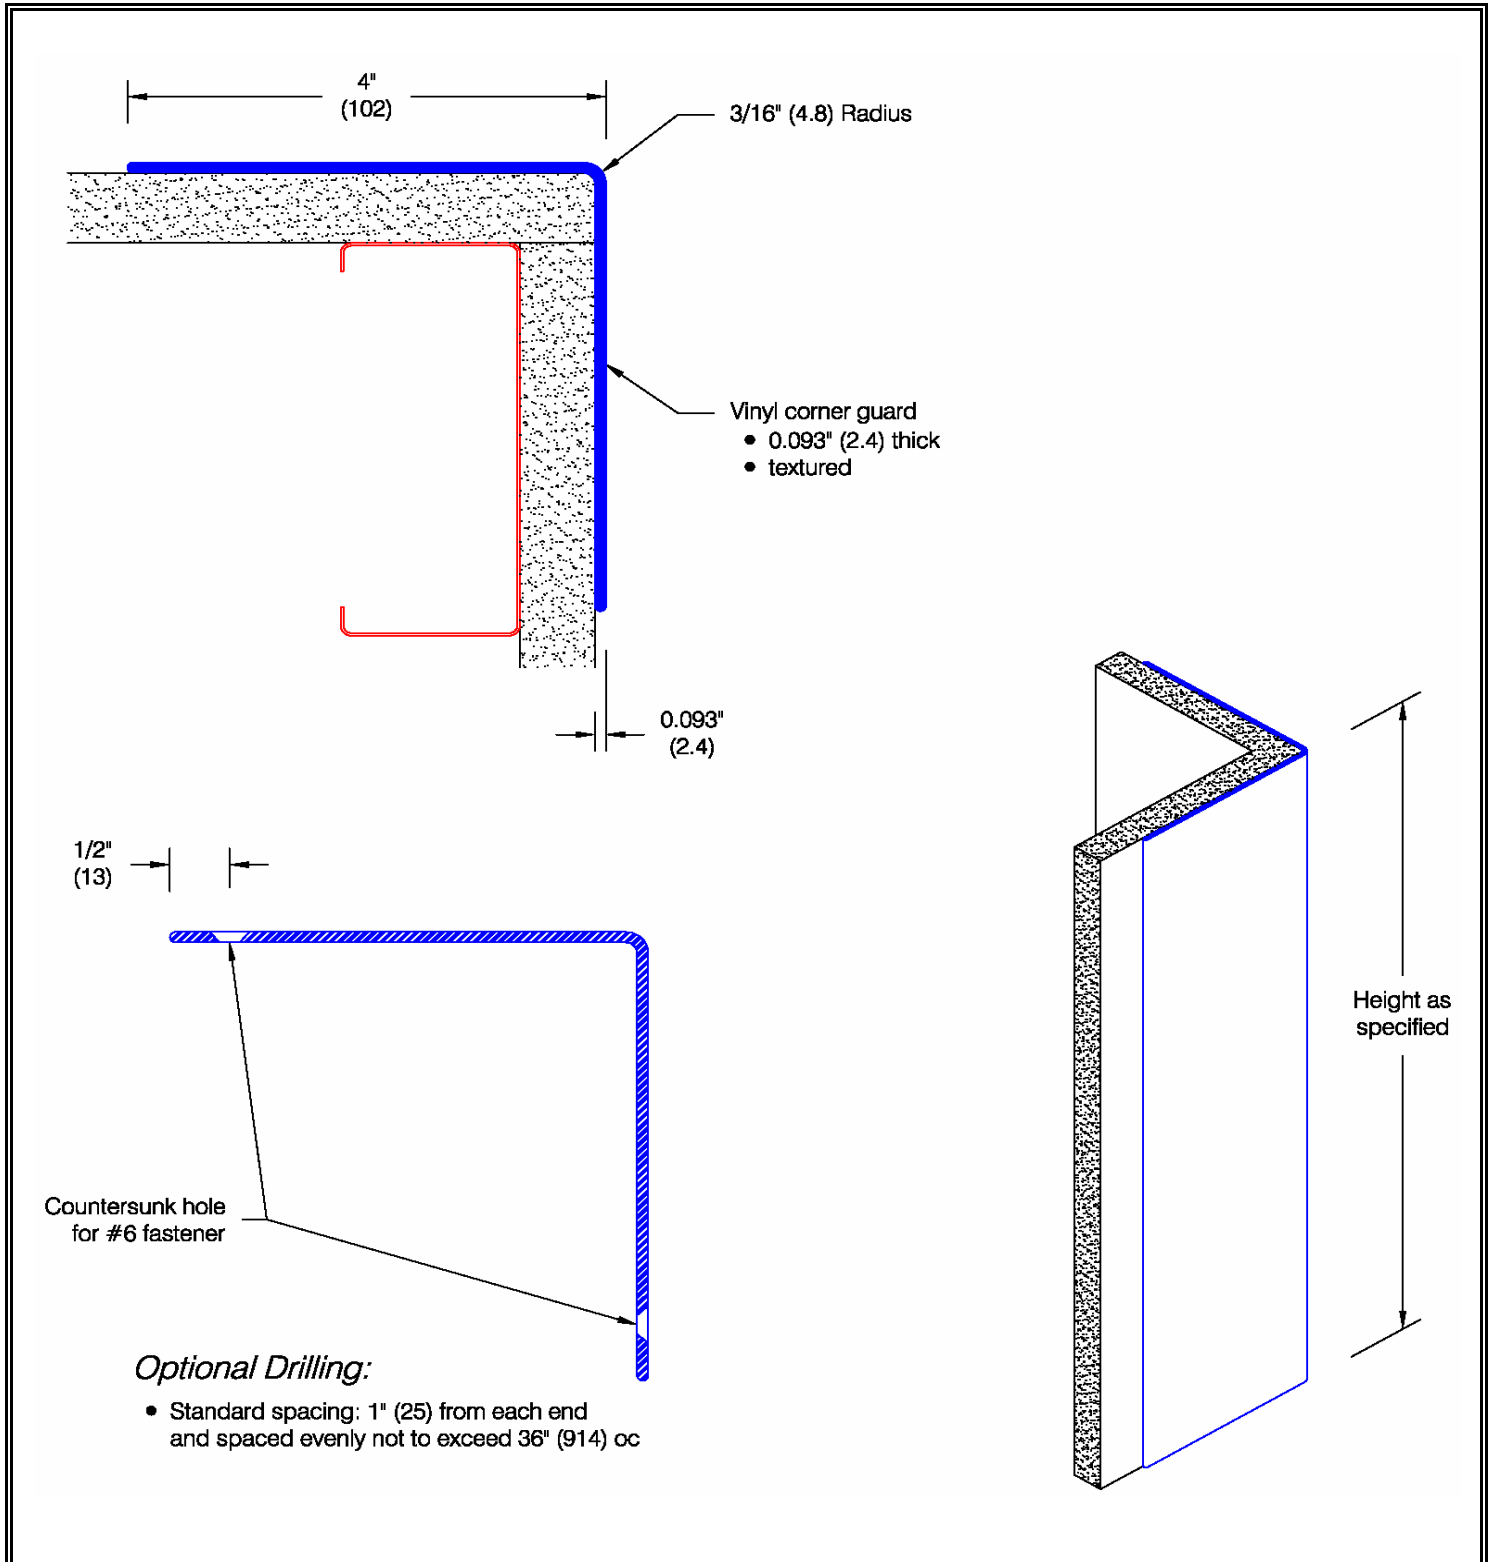

# ELECTRA<sup>®</sup> 4" Corner Guard (CG-2144)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Surface	High abuse	25.4 ft.lbs/in. ASTM D-256	New and renovation	Vinyl	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p><b>Vinyl Features:</b></p> <ul style="list-style-type: none"> <li>• Class A fire rating</li> <li>• Stock lengths:                             <ul style="list-style-type: none"> <li>4'-0" (1219 mm)</li> <li>8'-0" (2438 mm)</li> <li>12'-0" (3658 mm)</li> </ul> </li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Custom colors available</li> </ul>	<p><b>Mounting Options:</b></p> <ul style="list-style-type: none"> <li>• Adhesive: (Undrilled) AD-1330 adhesive supplied separately</li> <li>• Drilled: Countersunk holes for ABSS-134 #6 x 1-1/2" (38 mm) oval head sheet metal screw supplied separately as required</li> <li>• Taped: AD-1365 double sided adhesive tape factory applied to corner guard</li> </ul>
---	---	--

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

	ITEMS	QUANTITY
<b>JOB NAME:</b>		
<b>JOB NUMBER:</b>	<b>Guard Length:</b> 4', 8', 12'	
<b>CONTRACTOR:</b>	<b>Color:</b>	
<b>ARCHITECT:</b>	<b>Adhesive:</b> AD-1330	
<b>DEALER NAME:</b>	<b>Drilled:</b>	
<b>SIGNATURE:</b> _____ <b>Date:</b> _____	<b>Taped:</b> AD-1365	