




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

ANDROMEDA[®] Flush 2" x 90° 2 Hour Fire Rated (CG-2167)

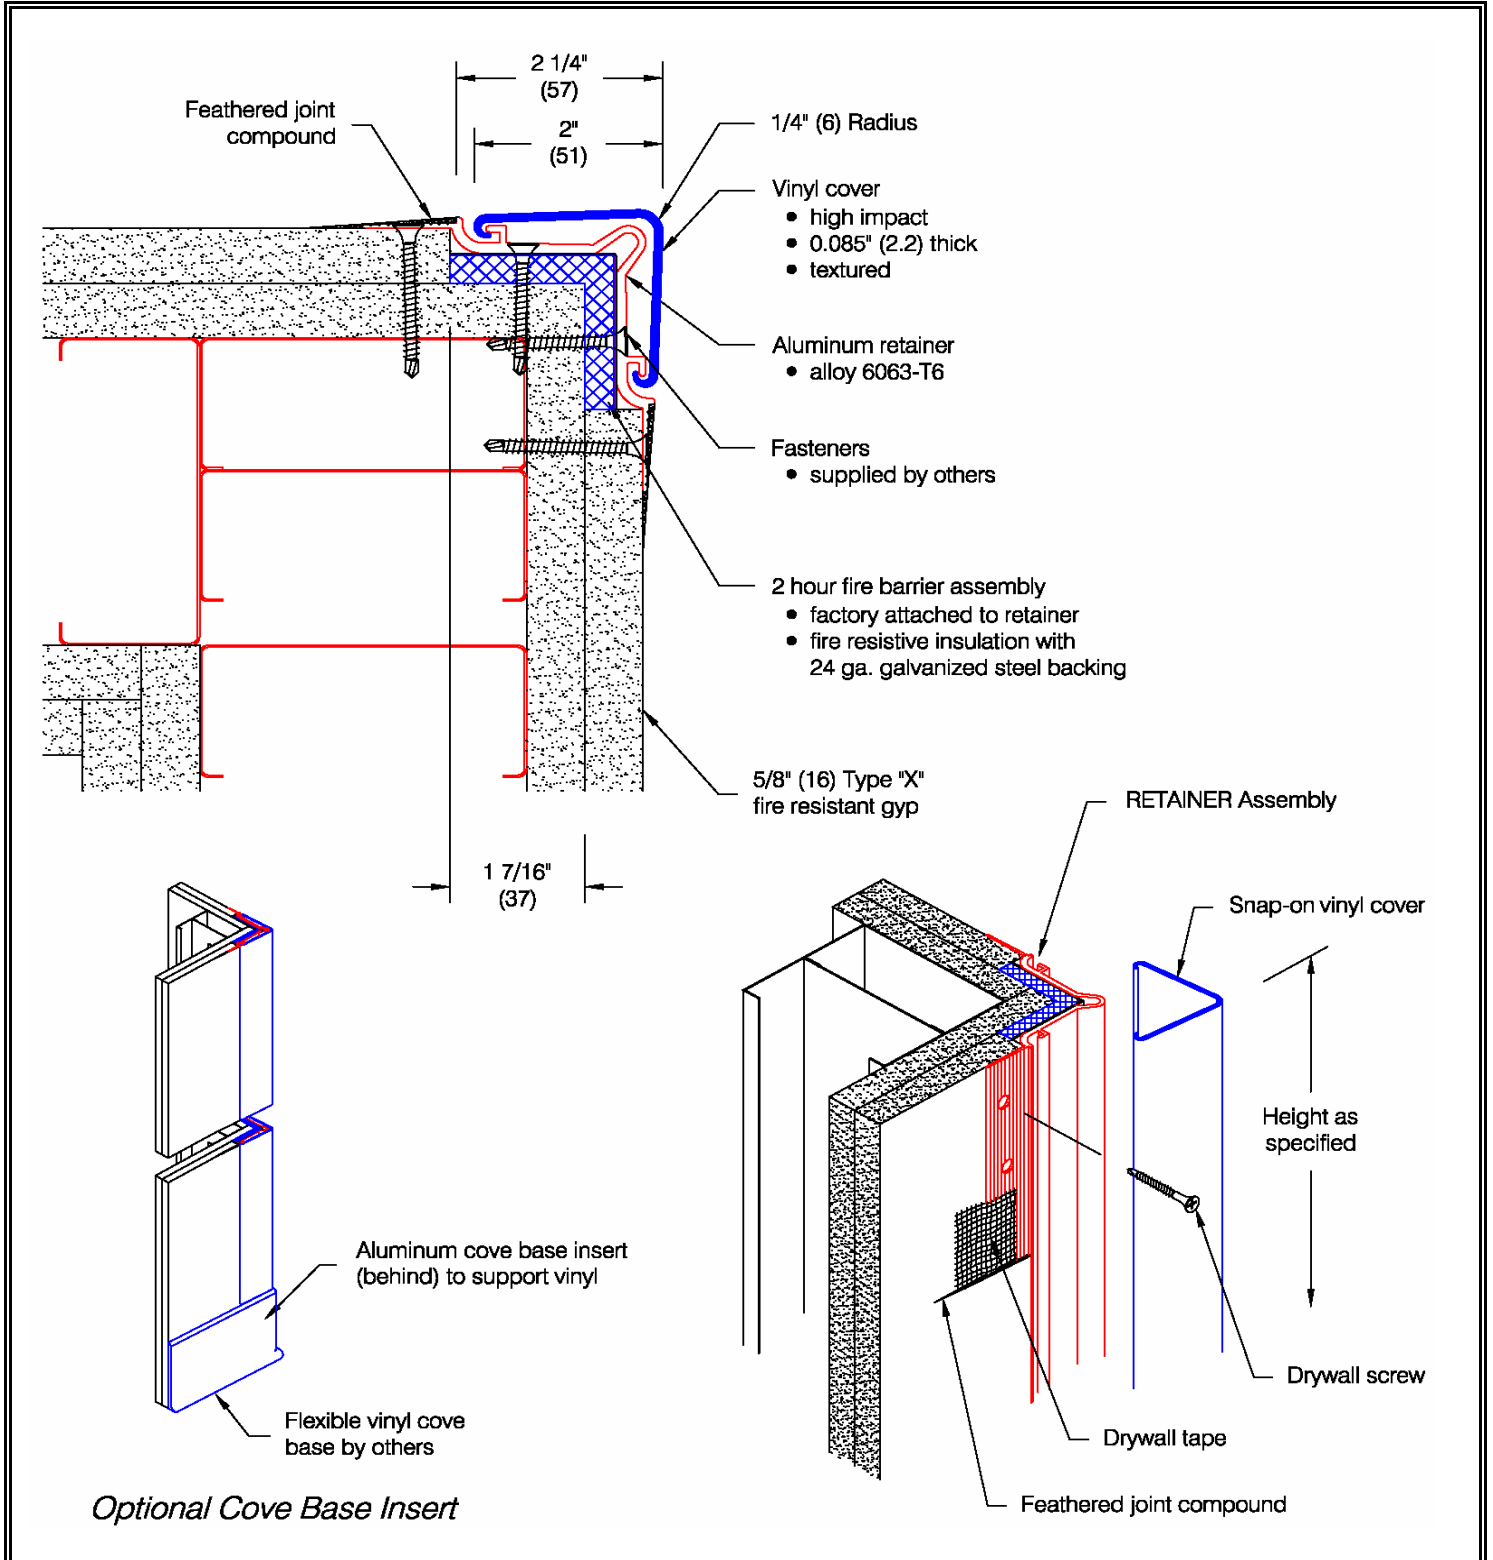

ANDROMEDA[®] Flush 2" x 90° 2 Hour Fire Rated (CG-2167)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Flush	High abuse	25.4 ft.lbs/in. ASTM D-256	New	Vinyl Aluminum	2 hour

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p>Features:</p> <ul style="list-style-type: none"> • Class A fire rating • Stock lengths: 8'-0" (2438 mm), 9'-0" (2743 mm), 10'-0" (3048 mm), 12'-0" (3658 mm) • Custom cut lengths available • Available with aluminum cove base insert for use with vinyl cove base standard in 4" (102 mm) and 6" (152 mm) heights 	<p>Finishes:</p> <p>Vinyl cover (textured):</p> <ul style="list-style-type: none"> • Manufacturer's standard colors • Custom colors available <p>Aluminum retainer:</p> <ul style="list-style-type: none"> • Mill finish aluminum
---	---

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

	ITEMS	QUANTITY
JOB NAME:		
JOB NUMBER:	Guard Length: 8', 9', 10', 12'	
CONTRACTOR:	Color:	
ARCHITECT:	Cove Base Insert:	
DEALER NAME:		
SIGNATURE:	Date:	