




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**


P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## CHEVRON CARPET MATS® (CM-1676)

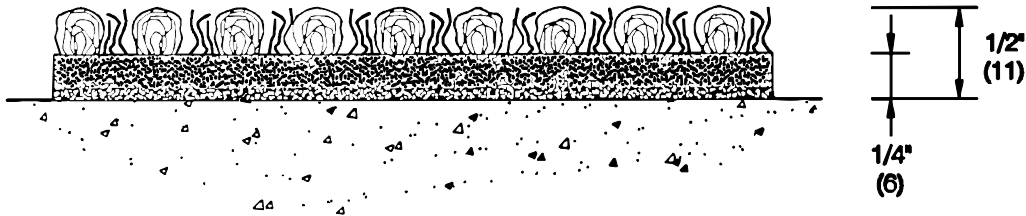

\* *Traffic can run parallel or perpendicular to carpet pattern. Carpets that are butted together must be installed with carpet pattern in the same direction.*

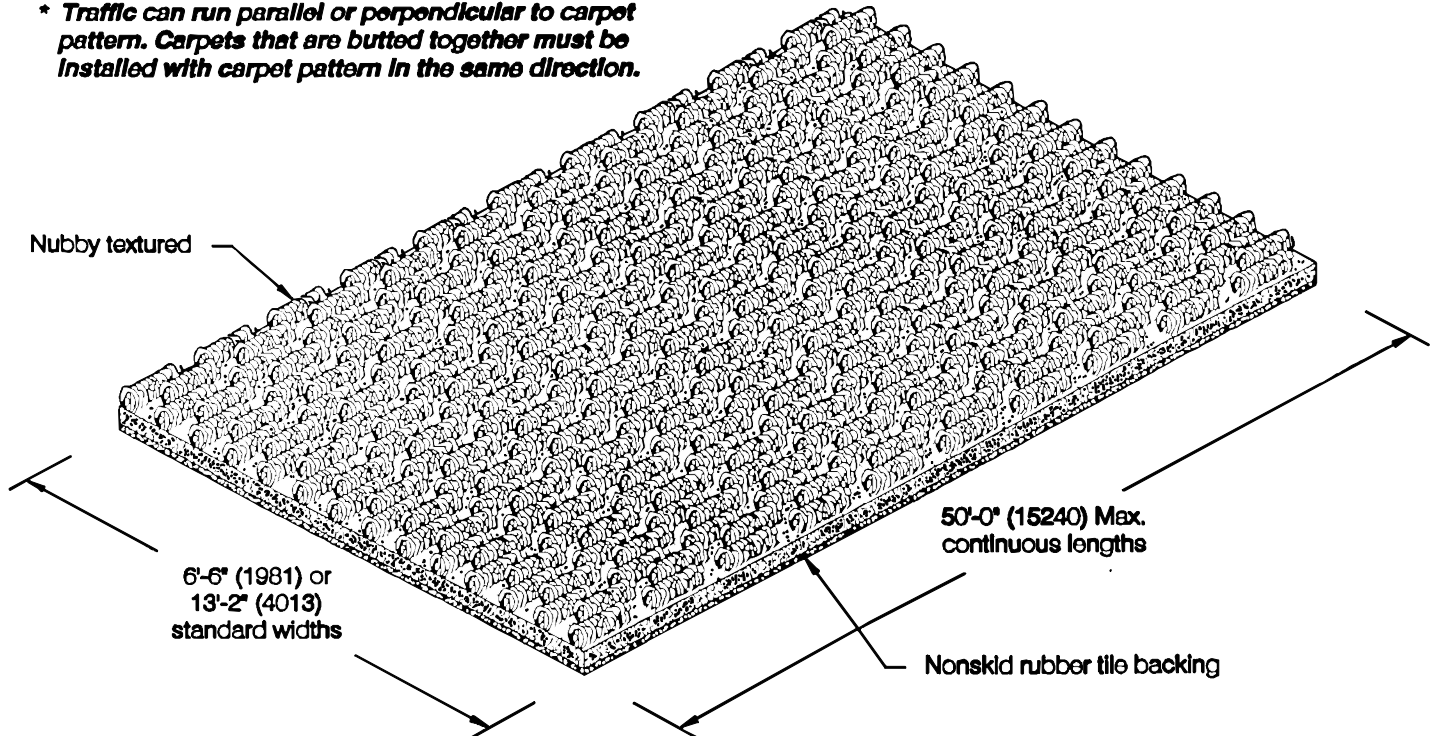


# CHEVRON CARPET MATS® (CM-1676)

<b>Features:</b> <ul style="list-style-type: none"> <li>• Polypropylene needlepunch</li> <li>• Bi-level herringbone</li> <li>• Secondary Backing PVC (vinyl)</li> <li>• Pile Weight: 26 oz / sq. yd.</li> <li>• Weight: 0.75 lbs / sq. ft.</li> <li>• Thickness: 1/2" (13 mm)</li> <li>• Flammability: DOC FF-1-70 and FF-2-70</li> <li>• Roll Widths: 3 ft., 4 ft., 6 ft.</li> <li>• Standard Mats:             <table style="margin-left: 20px; border: none;"> <tr> <td>2' x 3'</td> <td>3' x 4'</td> <td>3' x 5'</td> <td>3' x 6'</td> <td>3' x 8'</td> </tr> <tr> <td>3' x 10'</td> <td>4' x 6'</td> <td>4' x 8'</td> <td>4' x 10'</td> <td></td> </tr> </table> </li> <li>• Static coefficient of friction:             <table style="margin-left: 40px; border: none;"> <tr> <td>Dry: 0.53</td> <td>Wet: 0.96</td> </tr> </table> </li> </ul>	2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 8'	3' x 10'	4' x 6'	4' x 8'	4' x 10'		Dry: 0.53	Wet: 0.96	<b>Finishes:</b> <ul style="list-style-type: none"> <li>• 4 Standard colors:             <ul style="list-style-type: none"> <li>Burgundy</li> <li>Charcoal</li> <li>Dark Brown</li> <li>Slate Blue</li> </ul> </li> </ul>
2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 8'									
3' x 10'	4' x 6'	4' x 8'	4' x 10'										
Dry: 0.53	Wet: 0.96												

**ADA A4.5.1 General Guidelines recommend a minimum wet and dry Static Coefficient of Friction of 0.6 for accessible routes and 0.8 for ramps.**

**NOTE ON DIMENSIONS:**

American Floor Products Company, Inc. requires that exact mat opening dimensions be provided. Mats will be fabricated 1/4" (6 mm) smaller in the left to right dimensions to allow for proper fit.

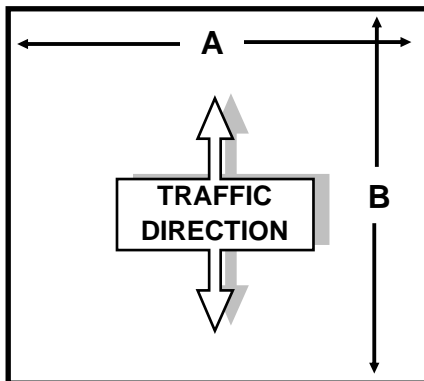

QUANTITY	DIMENSIONS A x B	SPECIAL CONSTRUCTION

<b>JOB NAME:</b>	<b>ITEMS</b>	<b>PLEASE SPECIFY</b>
<b>JOB NUMBER:</b>	Type of Frame & Finish:	
<b>CONTRACTOR:</b>	Bevel or Square Edge:	
<b>ARCHITECT:</b>	Logo:	Yes <input type="checkbox"/> No <input type="checkbox"/>
<b>DEALER NAME:</b>	Background Color:	
<b>APPROVED BY:</b>	Date:	Logo Color: