




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
 email: sales@afco-usa.com • Web Site: www.afco-usa.com


CUSTOMER P.O. #

UNIFLEX® Cord Carpet Insert (UX-275)

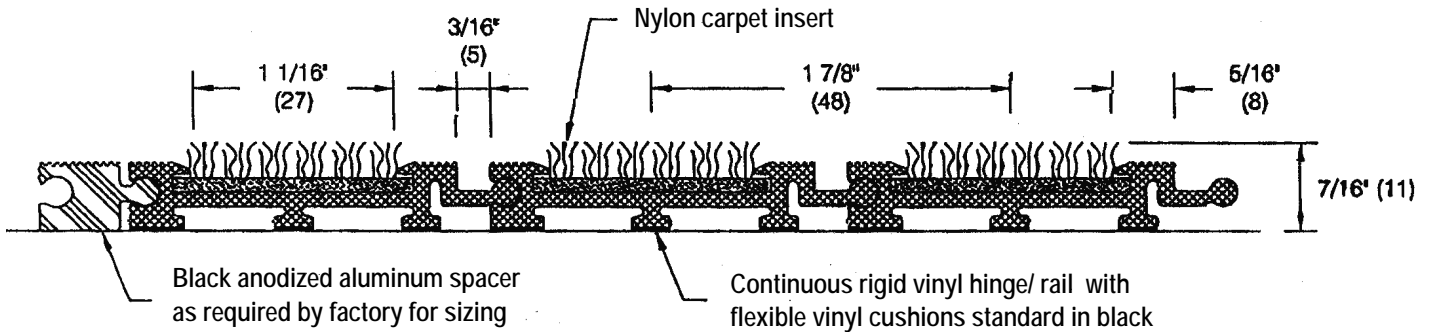

Optional Framing:


AFCO requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6 mm) smaller than exact opening dimensions to allow for proper fit.

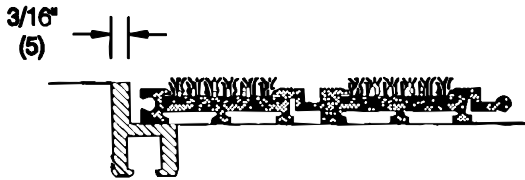


Recessed frame MF-150, MF-151, MF-152, MF-153



Recessed frame MF-166



Surface frame MF-168

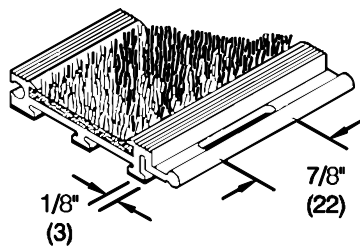


Perforated hinge

Hinge Details:



Optional Nosings:




Square vinyl nosing



Beveled vinyl nosing

Sectioning Information:

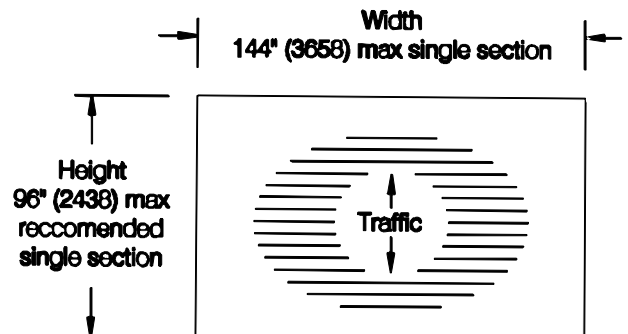

* Mats over 48 square feet may require sectioning as determined by the factory

UNIFLEX® Cord Carpet Insert (UX-275)

Finish	Application	Function	Traffic		Materials	Location	Durability
			Pedestrian	Rolling			
Black	Mall entry Hospital Bank Office building Retail Hotel School institution	Scraping Absorption	Heavy	Medium	Vinyl compounds	Interior	Excellent

Testing in accordance with NFPA 253 (ASTM E 648):
Critical Radiant Flux - Flammability

<p>Features:</p> <ul style="list-style-type: none"> • Continuous vinyl hinge/ rail and cushion for superior noise reduction • Roll-up for easy cleaning of recess • Optional perforated hinge for added drainage • Single section width to 144" (3658 mm) • 100% polyamide nylon fibers, 5/32" (4 mm) pile height 35 oz/sq. yard tufted at 78,000 fibers/ sq. M. • Static coefficient of friction (ASTM D 2047-82) Dry: 0.49 Wet: 0.77 • Rolling Load: 350 lbs./wheel 	<p>Finishes:</p> <ul style="list-style-type: none"> • Cord long wear carpet insert: Select from manufacturer's color samples
--	---

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Dimension:	
CONTRACTOR:	Solid or Perforation:	
ARCHITECT:	Frame:	
DEALER NAME:	Insert Style:	
APPROVED BY:	Date:	Insert Color: