


AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422 email: sales@afco-usa.com• Web Site: www.afco-usa.com


CUSTOMER P.O. #

UNIFLEX® Vinyl Insert (UX-275)

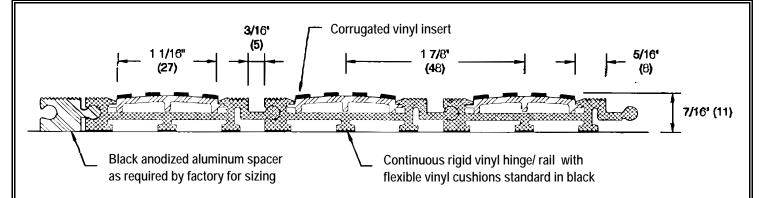

Optional Framing:

AFCO requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6 mm) smaller than exact opening dimensions to allow for proper fit.







Recessed frame MF-150, MF-151, MF-152, MF-153



Recessed frame MF-166



Surface frame MF-168



Hinge Details:



Ball & Socket Hinge

Optional Nosings:




Square vinyl nosing



Beveled vinyl nosing

Sectioning Information:



* Mats over 48 square feet may require sectioning as determined by the factory

UNIFLEX® Vinyl Insert (UX-275)

Finish	Application	Function	Tra	ffic	Materials	Location	Durability
1 1111311	Application	i diletion	Pedestrian	Rolling	Materiais	Location	Durability
Black	Mall entry	Scraping	Heavy	Medium	Vinyl compounds	Interior	Excellent
	Hospital	Absorption					
	Bank						
	Office building						
	Retail						
	Hotel						
	School institution						

Testing in accordance with NFPA 253 (ASTM E 648): Critical Radiant Flux - Flammability

Features:	Finishes:
 Continuous vinyl hinge/ rail and cushion for 	Corrugated vinyl insert (colorable):
superior noise reduction	Select from manufacturer's color samples
 Roll-up for easy cleaning of recess 	
 Optional perforated hinge for added drainage 	
 Single section width to 144" (3658 mm) 	
Corrugated vinyl insert (colorable):	
Flexible vinyl surface	
Rigid vinyl (non-shrink) base	
 Static coefficient of friction (ASTM D 2047-82) 	
Dry: 0.61 Wet: 0.92	
Rolling Load: 350 lbs./wheel	

JOB NAME:		ITEMS QUANTIT	Γ Y
JOB NUMBER:		Dimension:	
CONTRACTOR:		Solid or Perforation:	
ARCHITECT:		Frame:	-
DEALER NAME:		Insert Style:	-
APPROVED BY:	Date:	Insert Color:	