



AMERICAN FLOOR PRODUCTS COMPANY, INC.


AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
 email: sales@afco-usa.com • Web Site: www.afco-usa.com


CUSTOMER P.O. #

STORM[®] Mat (CM-1677)

ALL SIZES SHOWN ARE INSIDE FRAME DIMENSIONS

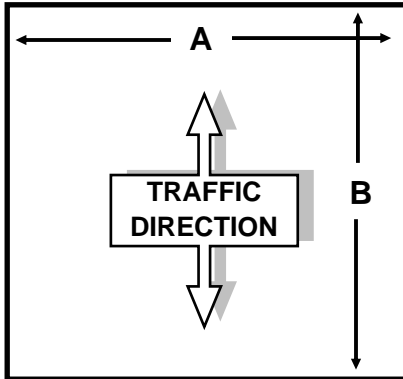

Colors: Blue, Brown, Camel, Charcoal, Gray, Green, Red, Red/Black, Tan, Walnut

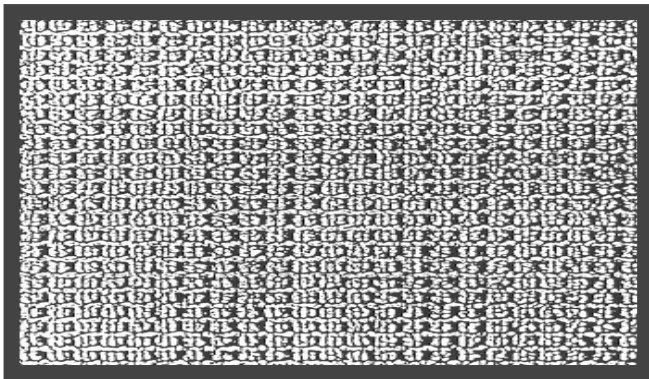

Sizes:

- | | | | |
|---------|----------|----------|----------|
| 2' x 3' | 3' x 5' | 4' x 6' | 6' x 8' |
| 2' x 4' | 3' x 10' | 4' x 10' | 6' x 12' |
| | 3' x 12' | 4' x 12' | 6' x 16' |
| | 3' x 16' | 4' x 16' | 6' x 20' |
| | 3' x 20' | 4' x 20' | |

| |
|-----------------|
| A x B |
| Type of Frame: |
| Style of Frame: |
| Type of Mat: |
| Color of Mat: |

SPECIFICATIONS

- FACE:** Molded reinforced
Needle punch
- YARN:** 100% solution dyed low static polypropylene
- PILE HEIGHT:** 1/4 inch
- FACE WEIGHT:** 24 ounces per square yard
- SURFACE DESIGN:** Squares
- RUBBER BORDER:** Black

Not recommended for use in areas exposed to grease or petroleum products.

FLAMMABILITY: Passes pill test DOC-FF-1-70

Flux per ASTM E-648 greater than 0.45 watts/cm²

STATIC: Electrical resistance, IBM method. Average megohms 40.6

Electrical resistance, Burroughs method. Average megohms 73.6

AATCC134: KVStep 0.1 and KVScuff 0.2

DIMENSIONAL STABILITY AACHENER TEST: Less than 0.2% change

| JOB NAME: | ITEMS | SELECTION QUANTITY |
|---------------------------------------|-----------------|--------------------|
| JOB NUMBER: | | |
| CONTRACTOR: | | |
| ARCHITECT: | | |
| DEALER NAME: | | |
| APPROVAL SIGNATURE: _____ Date: _____ | DRAWN BY: _____ | |