




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
 email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## CHIPPEWA® Wall Guard (WG-2252)

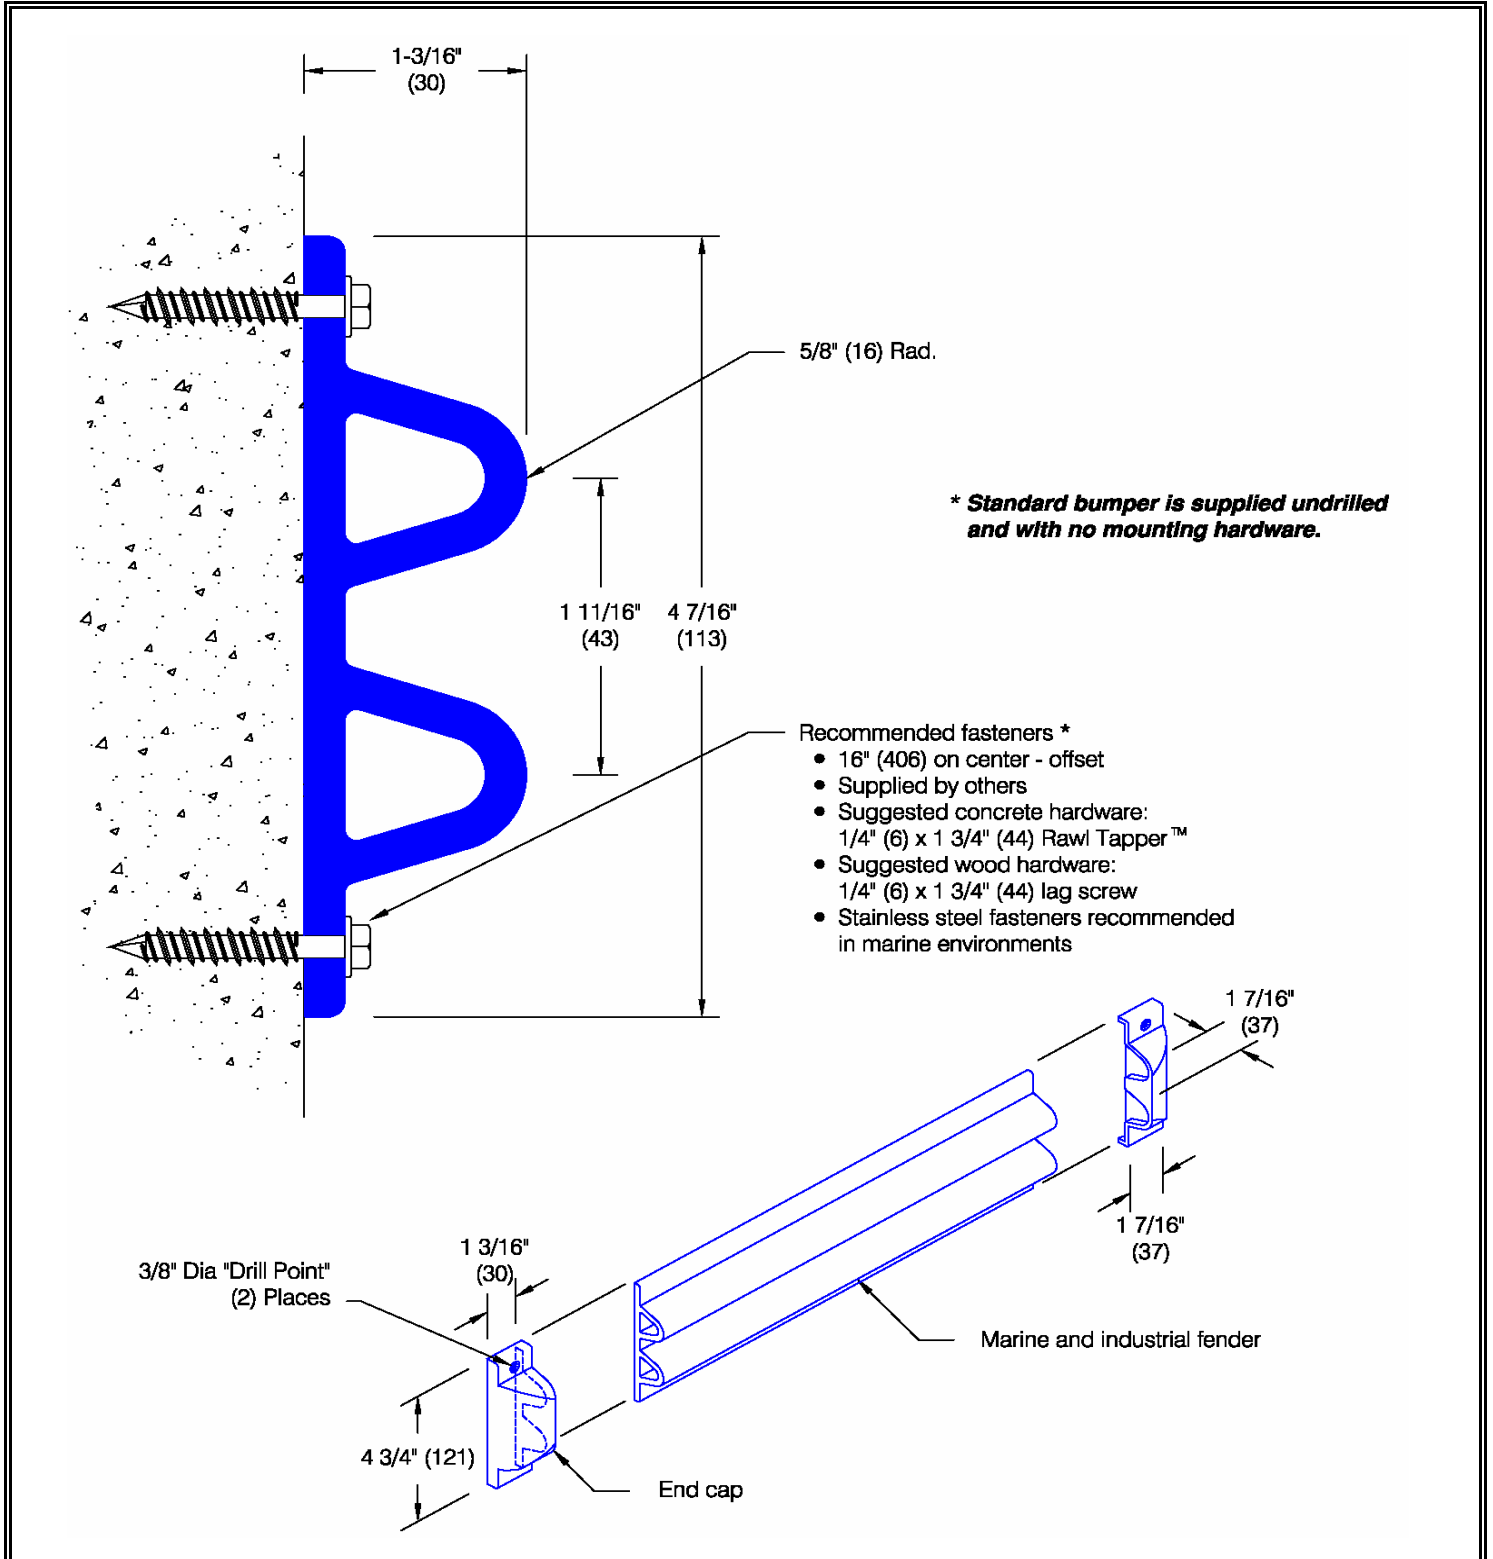

# CHIPPEWA® Wall Guard (WG-2252)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
<b>Sculpted</b>	High abuse	25.4 ft.lbs/in. ASTM D-256	N/A	Vinyl	N/A

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Extruded flexible vinyl to RMA tolerances</li> <li>• Durometer: (ASTM D-2240) 80 ± 3, Shore A</li> <li>• Tensile strength: (ASTM D-412) 2,205 PSI</li> <li>• Elongation: (ASTM D-412) 360%</li> <li>• Specific gravity: (ASTM D-792) 137 ± 0.02 229 lbs./in. min.</li> <li>• Weight: 1.4 lbs./lin. ft.</li> <li>• Stock length: 12'-0" (3658 mm)</li> </ul> <p><b>Optional Features:</b></p> <ul style="list-style-type: none"> <li>• Urethane end cap (Black only)</li> </ul>	<p><b>Standard Colors:</b></p> <ul style="list-style-type: none"> <li>(01)Black</li> <li>(03)Tan</li> <li>(04)Brown</li> <li>(05)Gray</li> <li>(10)White</li> <li>(70)Safety Yellow</li> </ul>
---	--

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

<b>JOB NAME:</b>	<b>ITEMS</b>	<b>QUANTITY</b>
<b>JOB NUMBER:</b>	<b>Bumper Length:</b>	
<b>CONTRACTOR:</b>	<b>Lok Bolt:</b>	
<b>ARCHITECT:</b>	<b>Drilling Pattern:</b>	
<b>DEALER NAME:</b>		
<b>SIGNATURE:</b>	<b>Date:</b>	